ACCURATE
LOCK & HARDWARE
AMERICAN CRAFTED SINCE 1972

M9145E / M915XE OPERATING INSTRUCTIONS

Mortise lock with motorized locking/unlocking.

Lock is furnished as FAIR SECURE and can be changed to FAIL SAFFE via the switch on the front.

KEY FUNCTION

The latch bolt may be momentarily retracted by key even if the lockset is electrically locked.

ELECTRICAL SPECIFICATIONS:

Provides 12/24V Fail Safe/Fail Secure Operation with low power consumption.
VOLTAGE: 12-24V AC/DC (11V – 30V)
CURRENT: 250 mA MAX Inrush, 10 mA MAX Holding
Non-polarized Leads

Distance 12V/24V	Wire Gauge
125’/250’	22
200’/400’	20
300’/600’	18
500’/1000’	16
750’/1500’	14
1250’/2500’	12
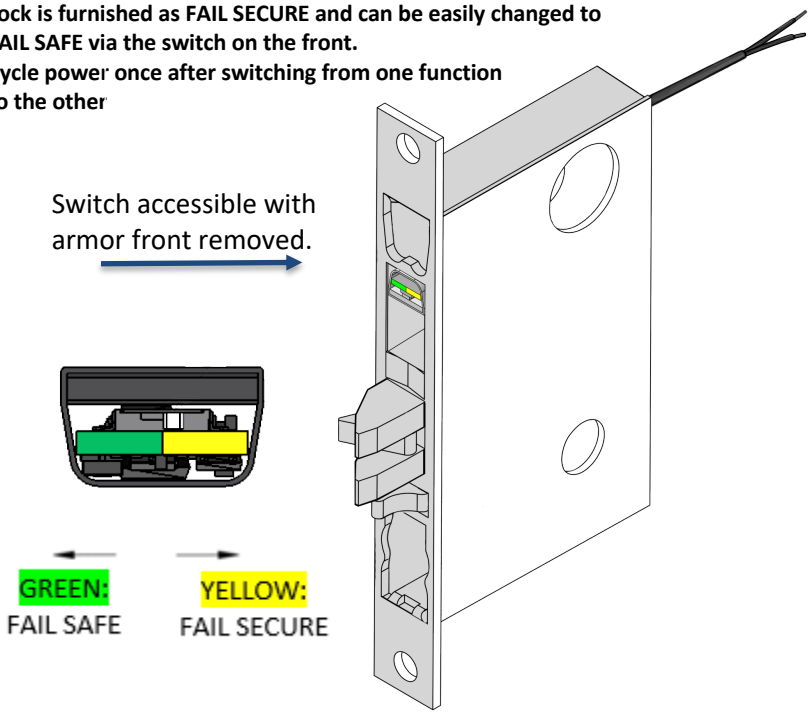
Lock is furnished as FAIL SECURE and can be easily changed to FAIL SAFE via the switch on the front.
Cycle power once after switching from one function to the other